

in30S2N1Lxx Ver.3

4-in-1, WDR ATM Camera



4-in-1
TVI/CVI
AHD
Analog

Full 1080P
2MP
HD Mode

24VAC
12VDC





WDR

800
TV Lines
Analog
Mode

SENS
UP

The Remote Alert **4-in-1 ATM Camera** uses the latest in WDR multi performance chipsets . Offering 1080P resolution in HD analog mode or 800TVL in standard analog mode. New Wide-D WDR performance combined with 3D Digital Noise Reduction, this compact camera will produce high quality video in the varying lighting conditions experienced in modern installations. The versatile in30 is extremely compact and flexible enough to meet all ATM installation requirements.

- Compact 36mm² footprint
- Hi-Res Board lens (various options)
- Multi Format Sensor
- Selectable Output, TVI, CVI, AHD, Analog
- Full 1080P in HD Mode
- 800TVL in Analog mode
- Adaptable mounting brackets
- Software Day/Night Function
- Min. Illumin. 0.03 Lux
- Wide Dynamic Range (WDR) 130db
- Backlight Compensation (BLC)
- Highlight Compensation (HLC)
- DEFOG
- 2D + 3D DNR
- Sense Up
- Selectable Shutter Speeds
- ATW / AWC White Balance
- OSD Menu
- Privacy Zones
- Motion Detection
- Optional UTC (Up the Coax) OSD Programmer
- 12VDC or 24VAC (when using power module)

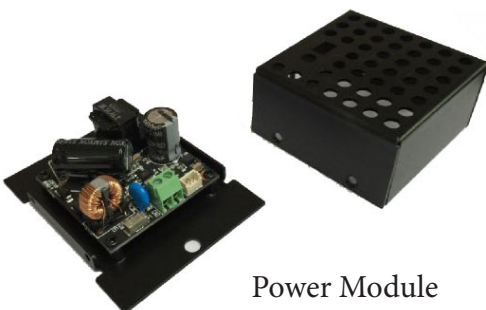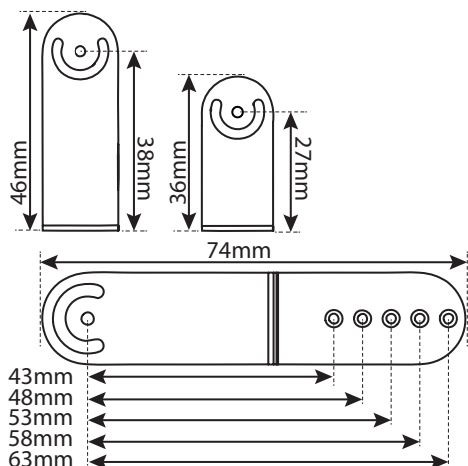

Power Module
inADAC24PM

	System	NTSC	
Imaging	Sensor	Mega Pixel Sensor	
	Effective Pixels	1920 x 1080	
Performance	Resolution HD	1080P Full HD	
	Resolution Analog	800TVL	
	Wide Dynamic Range	130dB Max	
	Sensitivity	0.03Lux	
	S/N Ratio	52dB	
	Day / Night	Software Controlled	
	Lens	Type	Fixed
	Focal Length	2.5mm or 3.0mm	
Functions	Video Interface	Analog, HD Mode TVI, CVI AHD	
	OSD	Multiple Language	
	Flickerless	On/Off	
	Wide Dynamic Range	Off/Low/Medium/High	
	HLC (High Light Supp)	Off/Low/Medium/High	
	BLC (Back Light Comp)	Off/Low/Medium/High	
	DEFOG	Off/Low/Medium/High	
	AGC	Off/Adjustable Level	
	Sens Up	Adjustable level	
	Electronic shutter	YES	
	Sync	Internal	
	Camera ID Number	Off/On 1~255	
	Camera Name	Off/On, 15 Characters	
	White Balance	ATW/Push/Manual	
	DNR	2D + 3D Off/Low/Medium/High	
	Gamma	0.35~0.55	
	Motion Detection	4 areas, Off/On, Position & Sensitivity	
	Privacy masking	8 areas, Off/On, Color, Position	
	Image functions	Flip, Mirror, D-Zoom	
	Input/Output	Video Output	CVBS 1.0Vp-p 75Ω
		Programming interface	Optional UTC Controller
	Power	Voltage	12VDC or 24VAC ±10 % when using supplied power module
		Power	3W Max.
Environmental	Operating Temperature	-10°C~+50°C	
	Humidity	Less than 90%, non condensing	
Physical	Construction	Die Cast	
	Dimensions	36 H x 36 W x 32 D	
	Weight	80g	
Order ID	2.5mm	in30S2N1L25	
	3.0mm	in30S2N1L30	
	3.0mm NCR Version	in30S2N1L30-NCR	
Power Module	12VDC/24VAC to 12VDC	included (inADAC24PM)	

Remote Alert reserves the right to amend specifications and design without prior notice